


# CAT® CG260

Series Gas Generator Sets



## Installed capacity of 1,727 MW<sub>el</sub> with more than 467 generator sets worldwide

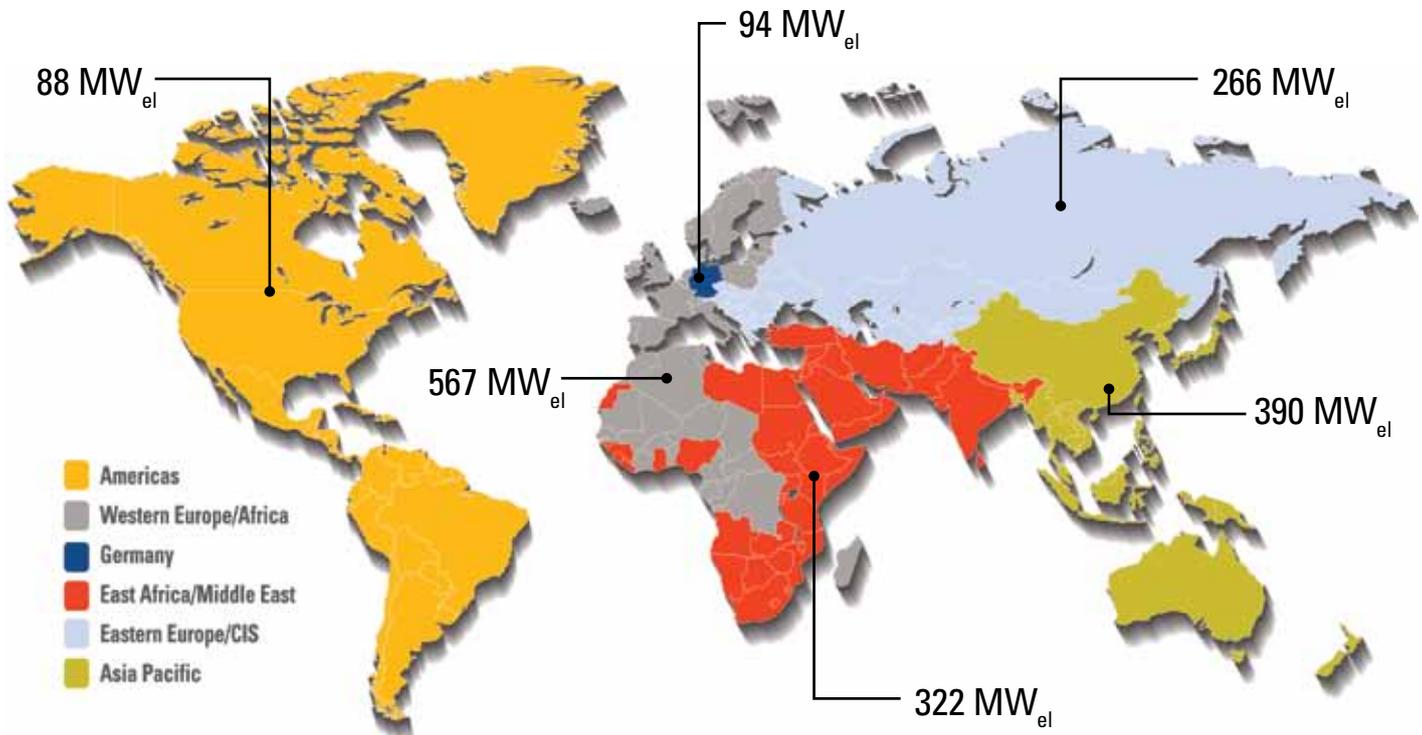

### MEETING YOUR NEEDS HAS SHAPED OUR HISTORY

At Caterpillar, we understand what it takes to deliver a successful gas power generation system, and it starts with a core machine that is designed for efficiency and reliability. Since the 1920s, Caterpillar has been designing and building engines for power production. Although the technology has changed over the years, the philosophy hasn't: to deliver the most reliable power generation at the lowest possible cost of ownership and operation. Today, Caterpillar not only manufactures power generation equipment, but we also provide customized project financing and trade solutions via Cat Financial and Cat World Trade.

### THE COMPLETE SOLUTION

Caterpillar is your complete gas solutions partner. From mechanical systems such as gas fuel train and heat recovery systems, to exhaust aftertreatment that complies with the world's most stringent emission requirements, Cat Gas Solutions engineering works with your local Cat dealer to deliver a complete scope of supply. Caterpillar also provides electrical systems such as master controls and paralleling switchgear, electrical distribution switchgear and uninterruptible power supplies (UPS) that can meet either UL or IEC requirements.

### PRODUCT SUPPORT WORLDWIDE

Your gas power system is supported by our factory trained global network of Cat dealers. Therefore, you can rest assured that your equipment will be ordered, delivered, installed and commissioned in consultation with a local expert. You'll also have the confidence that Caterpillar will be there to keep you up and running. Cat dealers have over 1,600 dealer branch stores operating in 200 countries to provide the most extensive post-sales support including oil and fuel monitoring services, preventive maintenance and comprehensive customer support agreements.

### LOWER LIFE CYCLE COST

With longer maintenance intervals, higher fuel efficiency and competitive repair options, Caterpillar delivers the lowest total owning and operating costs. When you design your facility within the Cat Application and Installation Guidelines, you can expect generator set availability up to 99 percent of planned operating hours annually. It all adds up to a strong return on your investment, year after year.

## 50 Hz PRODUCT PERFORMANCE

ENGINE TYPE	UNITS	CG260-12		CG260-16	
Bore/stroke	mm in	260/320	10.2/12.6	260/320	10.2/12.6
Displacement	l in <sup>3</sup>	203.9	12,443	271.8	16,586
Speed	rpm	1,000		1,000	
Mean piston speed	m/s ft/s	10.7	35	10.7	35
Length <sup>1)</sup>	mm in	7,860	309	9,200	362
Width <sup>1)</sup>	mm in	2,660	105	2,690	106
Height <sup>1)</sup>	mm in	3,390	133	3,390	133
Dry weight genset	kg lb	43,100	95,036	51,400	113,337

## NATURAL GAS

ENGINE TYPE	UNITS	CG260-12		CG260-16	
Electrical power <sup>2)</sup>	kW <sub>e</sub>	3,333		4,300	
Mean effective pressure	bar psi	20.0	290	19.4	281
Thermal output (+/-8 %) <sup>3)</sup>	kW Btu/m	3,206	182,484	4,164	237,013
Electrical efficiency <sup>2)</sup>	%	44.1		44.1	
Thermal efficiency <sup>3)</sup>	%	42.4		42.7	
Total efficiency	%	86.5		86.8	

**NO<sub>x</sub> ≤ 500 mg/Nm<sup>3</sup>, 1 g/bhp-h**

## BIOGAS

ENGINE TYPE	UNITS	CG260-12		CG260-16	
Electrical power <sup>2)</sup>	kW <sub>e</sub>	2,830		3,770	
Mean effective pressure	bar psi	17.0	247	17.0	247
Thermal output (+/-8%) <sup>3)</sup>	kW Btu/m	2,734	155,618	3,460	196,942
Electrical efficiency <sup>2)</sup>	%	42.3		42.9	
Thermal efficiency <sup>3)</sup>	%	40.8		39.4	
Total efficiency	%	83.1		82.3	

**NO<sub>x</sub> ≤ 500 mg/Nm<sup>3</sup>, 1 g/bhp-h**

1) Transport dimensions of genset; components set up separately must be taken into consideration.

2) According to ISO 3046/1 at voltage = 11 kV, PF = 1.0 for 50 Hz, and a minimum methane number of MN 70 for natural gas, MN 130 for biogas.

3) Cooling of the exhaust gases to 120° C (248° F) for natural gas and 150° C (302° F) for biogas, plus engine jacket water heat.

NO<sub>x</sub> emissions: Measured as NO<sub>2</sub> dry exhaust gas @ 5% O<sub>2</sub>

Biogas fuels assumed to meet published engine-in contaminant limits with compositions:

Sewage gas (65 % CH<sub>4</sub> / 35 % CO<sub>2</sub>)

Biogas (60 % CH<sub>4</sub> / 32 % CO<sub>2</sub> / 8% N<sub>2</sub>)

Landfill gas (50 % CH<sub>4</sub> / 27 % CO<sub>2</sub> / 23% N<sub>2</sub>)

Minimum heating value (LHV) = 18.0 MJ/Nm<sup>3</sup> or 457 Btu/scf.

Specifications for special gases available.

Engine configuration with dry exhaust manifolds.

Data is representative and non-binding. Contact your Cat dealer for site and fuel specific performance.

## 60 Hz PRODUCT PERFORMANCE

ENGINE TYPE	UNITS	CG260-12		CG260-16	
Bore/stroke	mm in	260/320	10.2/12.6	260/320	10.2/12.6
Displacement	l in <sup>3</sup>	203.9	12,443	271.8	16,586
Speed	rpm	900		900	
Mean piston speed	m/s ft/s	9.6	31	9.6	31
Length <sup>1)</sup>	mm in	8,000	315	9,420	371
Width <sup>1)</sup>	mm in	2,660	105	2,690	106
Height <sup>1)</sup>	mm in	3,390	133	3,390	133
Dry weight genset	kg lb	42,500	93,713	51,450	113,447

## NATURAL GAS

ENGINE TYPE	UNITS	CG260-12		CG260-16	
Electrical power <sup>2)</sup>	kW <sub>e</sub>	3,000		4,000	
Mean effective pressure	bar psi	18.1	263	18.1	263
Thermal output (+/-8 %) <sup>3)</sup>	kW Btu/m	2,893	164,669	3,884	221,076
Electrical efficiency <sup>2)</sup>	%	43.7		43.7	
Thermal efficiency <sup>3)</sup>	%	42.1		42.4	
Total efficiency	%	85.8		86.1	

**NO<sub>x</sub> ≤ 500 mg/Nm<sup>3</sup>, 1 g/bhp-h**

## BIOGAS

ENGINE TYPE	UNITS	CG260-12		CG260-16	
Electrical power <sup>2)</sup>	kW <sub>e</sub>	2,530		3,370	
Mean effective pressure	bar psi	17.0	247	17.0	247
Thermal output (+/-8%) <sup>3)</sup>	kW Btu/m	2,416	137,518	3,018	171,784
Electrical efficiency <sup>2)</sup>	%	42.2		43.1	
Thermal efficiency <sup>3)</sup>	%	40.3		38.6	
Total efficiency	%	82.5		81.7	

**NO<sub>x</sub> ≤ 500 mg/Nm<sup>3</sup>, 1 g/bhp-h**

1) Transport dimensions of genset; components set up separately must be taken into consideration.

2) According to ISO 3046/1 at voltage = 4.16 kV, PF = 1.0 for 60 Hz, and a minimum methane number of MN 80 for natural gas, MN 130 for biogas.

3) Cooling of the exhaust gases to 120° C (248° F) for natural gas and 150° C (302° F) for biogas, plus engine jacket water heat.

NO<sub>x</sub> emissions: Measured as NO<sub>2</sub> dry exhaust gas @ 5% O<sub>2</sub>

Biogas fuels assumed to meet published engine-in contaminant limits with compositions:

Sewage gas (65 % CH<sub>4</sub> / 35 % CO<sub>2</sub>)

Biogas (60 % CH<sub>4</sub> / 32 % CO<sub>2</sub>, rest N<sub>2</sub>)

Landfill gas (50 % CH<sub>4</sub> / 27 % CO<sub>2</sub>, rest N<sub>2</sub>)

Minimum heating value (LHV) = 18.0 MJ/Nm<sup>3</sup> or 457 Btu/scf.

Specifications for special gases available.

Engine configuration with dry exhaust manifolds.

Data is representative and non-binding. Contact your Cat dealer for site and fuel specific performance.