

Quiet operation

Unique controls

Compact and manoeuvrable

Robust and reliable



AM 22

Hand pallet truck (2,200 kg)

The AM 22 hand pallet truck is the ideal solution for all manual transportation over short distances. Advantages:

- Easy to operate controls – equally comfortable for left and right-handed operators. Comfortable and safe manoeuvring with one hand on the tiller arm is easy.
- Optional fast lift (up to 120 kg) for lifting pallets clear of the floor with only three pump strokes.


- Short front-end length – offering maximum manoeuvrability in restricted conditions.

Chromed wheel and joint bushings allow easy pulling or pushing. Extremely quiet, maintenance-free operation impresses across the board.

Optimum use on a wide range of surfaces thanks to different roller coatings.

**JUNGHEINRICH**

AM 22

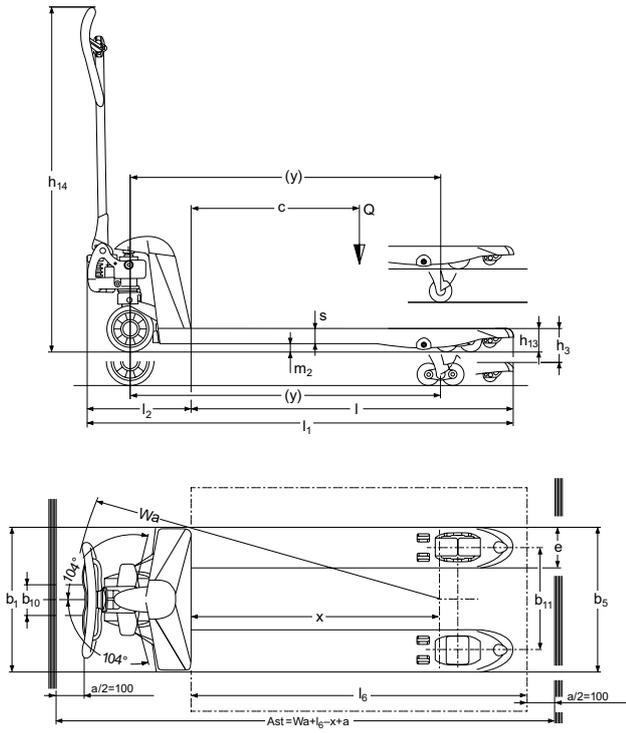

Technical data in line with VDI 2198

Identification	1.1	Manufacturer (abbreviation)		Jungheinrich				
	1.2	Model		AM 22				
	1.3	Drive		manual				
	1.4	Manual, pedestrian, stand-on, seated, order picker operation		hand				
	1.5	Load capacity/rated load	Q t	2.2				
	1.6	Load centre distance	c mm	400	500	534	600	610
	1.8	Load distance	x mm	535	690	794	890	947
	1.9	Wheelbase	y mm	755	910	1,014	1,110	1,167
	Weights	2.1	Net weight	kg	51 ¹⁾	54 ¹⁾	56 ¹⁾	58 ¹⁾
2.3		Axle loading, unladen front/rear	kg				38 / 20 ⁴⁾	
Wheels / frame	3.1	Tyres		C,V,N				
	3.2	Tyre size, front	mm	Ø 170x50				
	3.3	Tyre size, rear	mm	Ø 82x96 ⁵⁾				
	3.5	Wheels, number front/rear (x = driven wheels)		2/2 or 2/4				
	3.6	Tread width, front	b ₁₀ mm	109				
	3.7	Tread width, rear	b ₁₁ mm	370				
	Basic dimensions	4.4	Lift	h ₃ mm	122			
4.9		Height of tiller in drive position min. / max.	h ₁₄ mm	1,234				
4.14		Standing height raised	h ₁₂ mm	205				
4.15		Height, lowered	h ₁₃ mm	83				
4.19		Overall length	l ₁ mm	1,165	1,320	1,424	1,520	1,577
4.20		Length to face of forks	l ₂ mm	373				
4.21		Overall width	b ₁ /b ₂ mm	520 ²⁾				
4.22		Fork dimensions	s/e/l mm	53 / 150 / 795 ³⁾	53 / 150 / 950 ³⁾	53 / 150 / 1,054 ³⁾	53 / 150 / 1,150 ³⁾	53 / 150 / 1,207 ³⁾
4.25		Width across forks	b ₅ mm	520 ²⁾				
4.32		Ground clearance, centre of wheelbase	m ₂ mm	30				
4.33		Aisle width for pallets 1000 × 1200 crossways	Ast mm	1,584	1,584	1,638	1,734	1,791
4.34	Aisle width for pallets 800 × 1200 lengthways	Ast mm	1,784	1,784	1,784	1,784	1,791	
4.35	Turning radius	W _a mm	919	1,074	1,178	1,274	1,331	
Performance data	5.3	Lowering speed, laden/unladen	m/s	0.09 / 0.02				

¹⁾ + 5 kg at 680 mm width across forks

²⁾ 680 mm also possible

³⁾ Other fork lengths available

⁴⁾ Width 520 mm

⁵⁾ Ø 82x62 mm tandem tyres

Benefit from the advantages



Ergonomic operating handle



Maintenance-free hydraulics



Permanently lubricated joints for maintenance-free operation



Contoured fork tips for easy pallet entry

Easy to operate

Smooth controls equally suitable for both left-handed and right-handed users. Particularly sensitive and controlled lowering of loads with the special lowering valve. The optional fast lift (up to 120 kg) ensures that Euro pallets can be lifted clear of the floor with just 3 pump strokes. The maximum lift height is achieved with only 5 pump strokes.

Shorter and more manoeuvrable

The front-end length of just 373 mm allows for reliable and easy operation, even in very confined spaces.

Effortless and simple

The optimised hydraulic system reduces the pump force required. The drawbar pull required is reduced by the bushes on the wheels.

Quiet and robust

The chromed bushes on the wheels and joints ensure quiet running and an exceptionally long service life. Excellent smooth running even without lubrication of the connections.

Clear and safe

Embossed markings on the truck show the exact, secure pallet position required for crossways lifting.

Durable

Strong forks. Contoured shapes. Welded tiller mounting. Protected entry rollers. Hard steel. Guarantee for maximum stability and durability. 2200 kg capacity with the basic version.

Additional / special equipment

Extensive additional equipment means the AM 22 is optimally equipped for any application. This includes for example, numerous fork lengths, wide range of width over forks, different braking systems or special paint. Also available is special equipment such as stainless steel or galvanised truck models.

Jungheinrich UK Ltd.

Head Office:
Sherbourne House
Sherbourne Drive
Tilbrook
Milton Keynes MK7 8HX
Telephone 01908 363100
Fax 01908 363180

info@jungheinrich.co.uk
www.jungheinrich.co.uk

The German production facilities in Norderstedt, Moosburg and Landsberg are certified. **ISO 9001**
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.



JUNGHEINRICH