

3000 kg capacity

Reinforced frame

Standard fast lift up to 120 kg

Robust and durable controls

Compact and manoeuvrable



AM 30

Hand pallet truck (3,000 kg)


The AM 30 hand pallet truck is the ideal solution for all manual transportation over short distances. Its exceptionally high capacity of 3000 kg makes it a universal helper – even for larger and unusually heavy loads. Advantages:

- Easy to operate controls – equally comfortable for left and right-handed operators. Comfortable and safe manoeuvring with one hand on the tiller arm is easy.

- Standard fast lift (up to 120 kg) for lifting pallets clear of the floor with just three pump strokes.
- Very high manoeuvrability in restricted conditions due to short front-end length.

Chromed wheel and joint bushings allow easy pulling or pushing. Extremely quiet, maintenance-free operation impresses across the board.

AM 30

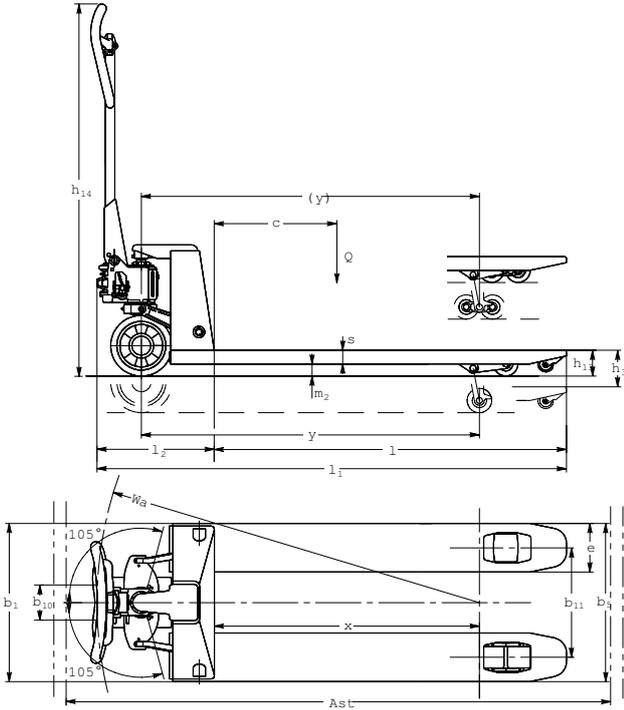

Technical data in line with VDI 2198

Identification	1.1	Manufacturer (abbreviation)		Jungheinrich	
	1.2	Model		AM 30	
	1.3	Drive		manual	
	1.4	Manual, pedestrian, stand-on, seated, order picker operation		hand	
	1.5	Load capacity/rated load	Q t	3	
	1.6	Load centre distance	c mm	600	1,050
	1.8	Load distance	x mm	936	1,801
	1.9	Wheelbase	y mm	1,174	2,054
	Weights	2.1	Net weight	kg	86
2.2		Axle loading, laden front/rear	kg	815 / 2,270	1,135 / 2,007
2.3		Axle loading, unladen front/rear	kg	28 / 58	57 / 85
Wheels / frame	3.1	Tyres		V	
	3.2	Tyre size, front	mm	Ø 200 x 50	
	3.3	Tyre size, rear	mm	Ø 80 x 70	
	3.5	Wheels, number front/rear (x = driven wheels)		2/4	
	3.6	Tread width, front	b ₁₀ mm	116	
	3.7	Tread width, rear	b ₁₁ mm	390	
	Basic dimensions	4.4	Lift	h ₃ mm	120
4.9		Height of tiller in drive position min. / max.	h ₁₄ mm	1,224	
4.14		Standing height raised	h ₁₂ mm	205	
4.15		Height, lowered	h ₁₃ mm	85	
4.19		Overall length	l ₁ mm	1,603	2,483
4.20		Length to face of forks	l ₂ mm	383	
4.21		Overall width	b ₁ /b ₂ mm	550	
4.22		Fork dimensions	s/e/l mm	45 / 160 / 1,220 ¹⁾	63 / 160 / 2,100 ¹⁾
4.25		Width across forks	b ₅ mm	550	
4.32		Ground clearance, centre of wheelbase	m ₂ mm	36	
4.33		Aisle width for pallets 1000 x 1200 crossways	Ast mm	1,803	2,683
4.34	Aisle width for pallets 800 x 1200 lengthways	Ast mm	1,803	2,683	
4.35	Turning radius	W _a mm	1,319	2,184	
Performance data	5.3	Lowering speed, laden/unladen	m/s	0.09 / 0.05	

¹⁾ Other fork lengths available

Benefit from the advantages



Contoured fork tips for easy pallet entry



Maintenance-free hydraulics



Control panel

Effortless transport of heavy loads

The AM 30 is ideal for the transport of especially heavy loads due to the special reinforcement of the load-bearing parts.

Designs for every application

Even loads with extreme centres of gravity can be transported safely. This is guaranteed by different fork lengths.

Easy to operate

- Smooth controls equally suitable for both left-handed and right-handed users.
- Sensitive and controlled lowering of loads with the special lowering valve.
- The standard fast lift (up to 120 kg) ensures that Euro pallets can be lifted clear of the floor with just 3 pump strokes.

- The maximum lift height is achieved with only 5 pump strokes.

Excellent manoeuvrability

The AM 30 guarantees maximum manoeuvrability, even in narrow aisles or on an HGV.

Jungheinrich UK Ltd.

Head Office:
Sherbourne House
Sherbourne Drive
Tilbrook
Milton Keynes MK7 8HX
Telephone 01908 363100
Fax 01908 363180

info@jungheinrich.co.uk
www.jungheinrich.co.uk

The German production facilities in Norderstedt, Moosburg and Landsberg are certified. **ISO 9001**
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.



JUNGHEINRICH